

NEW WATER RESISTANT FLOOR

Dear Customer.

Using new technologies, we've developed a unique Symfonia AQUA ZERO flooring for you.


With our experience and innovative solutions, we've kept the best features of Aurum panels and added new properties that provide many more practical benefits. Prepared on a 12 mm water



resistant board, with an **extremely tight AQUA PEARL locking system**, they guarantee spill resistance (even up to 24 hours according to the NALFA test).

SYMFONIA panels are **friendly for children**, who often create artistic works, perhaps when experimenting with wet acrylic paints. Symfonia AQUA ZERO will also easily deal with our homestay pets, who are not yet taught to do their business outside. In addition, the **tightness of the new floor will be perfect for** a home kitchen, especially when exposed to splashes. Finally, the Symfonia floor can be wet cleaned, also with a steam mop, without fear of damaging the panels. The floor is suitable for large open areas (even 12x12 linear meters).

We are delighted to present an innovative product that is convenient, makes everyday life easier, and is a direct response to our individual needs.

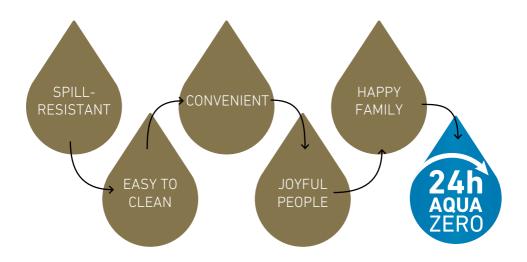

FLOORING FOR THE DISCERNING

A NEW ERA OF ECOLOGICAL LAMINATE FLOORING



- 1. Mineral layer protecting against abrasion
- 2. Decorative layer
- 3. Water resistant HDF board
- 4. Backing layer
- 5. Watertight AQUA PEARL locking system



TECHNICAL DATA DECLARATION

PROPERTIES	TEST STAND -ARD	SYMFONIA 24h	PROPERTIES	TEST STAND -ARD	SYMFONIA 24h	PROPERTIES	TEST STAND -ARD	SYMFONIA 24h
Surface	-	SYNCRO 3D	Fire classification	EN 13501-1	C _{ft} -s1	Height differences between elements (h)	EN 13329	h _{aver.} ≤0,10 mm h _{max.} ≤0,15mm
Edges	-	V-FUGA	Slip resistance	EN 13893	DS			
Density	-	930 kg/m3	Formaldehyde emission	EN 14041	E1	Openings between elements (o)	EN 13329	o _{aver.} ≤0,15 mm o _{max} ≤0,20 mm
Locking	-	Aqua Pearl	Length (l)	EN 13329	1380 +/- 0,5 mm			
Floor heating	-	ОК	Width	EN 13329	191 +/- 0,10 mm	Thickness swelling	EN 13329	≤7%
Thermal resistance	EN 12667	12 mm: R < 0,099 (m2 K)/W	Thickness	EN 13329	12 +/-0,5 mm	· Light fastness	EN 13329	Colour contrast between unexposed and exposed sample part ≥ 4 of grey scale according to EN 20105-A02
Classification	EN 13329	Class 23,33	Squareness of the element	EN 13329	max≤0,20 mm			
Abrasion resistance	EN 13329	AC5≥6000	Edge straightness	EN 13329	max ≤0,30 mm/m	Resistance to staining	EN 13329	5 (grupy/groups 1 and 2), 4 (grupa/group 3)
Impact resistance	EN 13329	Small ball—AC5 ≥ 15N Big ball—AC5 ≥1000 mm	Flatness (f)	EN 13329	f _w concave ≤0,15 % f _w convex ≤0,20 % ficoncave ≤0,50 % ficonvex <1.00 %	5 panels = 1,315m² / 56 boxes = 79,074m²		



Presto Oak













































Splashed something on it? Don't worry.

The AQUA ZERO floor is ideal for a kitchen where there is a lot going on. It's splash-proof so, wet cleaning and unexpected accidents are not a problem for our floor.



Spilled water under the plant pots? No worries.

For a lot of people, a home without flowers is not a home. For some, the home garden is a getaway from everyday life, a moment of relaxation and respite. Quick and easy **cleaning** of splashes or sprinkled soil on the AQUA ZERO floor saves time and is really convenient. You can focus on your passions and your pleasure.





D4527 Vivo Oak





















D4531 Sonata Oak

















A pet in the apartment?

Every pet owner knows what constantly dirty and splashed floors are like. Pet footprints or splashing water while drinking is a common occurrence. Taking care of cleanliness becomes more of a pleasure with the AQUA ZERO floor. Its resistance to dirt and splashes gives a sense of real comfort, and the results of cleaning will last for a long time.



Family games and activities it's easier than you think!

Creative family games at home are a real pleasure with the AQUA ZERO floor. Painting, drawing or making stamps? No worries, this floor will easily deal with it and still remain aesthetic for years.





D4528 Legato Oak







191 mm 1380 mm













191 mm 1380 mm











SWISS KRONO sp. z o.o.

ul. Serbska 56, 68-200 Żary Polska / Poland Tel. +48 68 36 31 100 info@swisskrono.pl www.swisskrono.pl

Product Manager: Tel. +48 68 36 31 297